

GATE-TTS

Gate-TTS is automatic gate with a metal U-shape leaf. The main difference is determined by telescopic design of leaf. Therefore the width of passage can be adjusted.



ELEGANT, LIGHT AND MINIMALISTIC PART OF ACCESS CONTROL SYSTEM



Key features:

- Solution for disabled and trolley access;
- Appropriate addition to other TiSO turnstiles (waist-height and full-height);
- Steadfast housing suitable for high traffic areas;
- Can be integrated with any type of access control systems;
- Perfect Fusion of Affordability and High Quality;
- Left hand, right hand and double-sided opening are available;
- Gate housing could be adapted for both indoor and outdoor installations;
- Compatible with Ramped Base Mobile Platform (TiSO Frame-M);
- Extensive Array of Accessories for Customization;
- Wired Remote Control Included in Standard Kit;
- Fail-safe;
- Low Power Consumption.



Technical Specifications:


Model	Gate-TTS 700	Gate-TTS 1050
Width, mm	865	1215
Length, mm		225
Height, mm		1000
Passage width, mm	700	1050
Mechanism	Servo-driven	
Blocking system	Single electromagnetic brake	
Operation mode	CW (100°) and CCW (100°)	
Emergency mode	Free exit/entry (gate is opening automatically)	
Power fail	Fail safe (gate could be opened manually — standard)	
MCBF, cycles	5 000 000	

Electrical Specifications:

Maximum power consumption, W	55
Voltage	From the AC (100-240)V, 50/60Hz; from a DC source 12 V

Finishing

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316; Polished SS AISI 304; Polished SS AISI 316; Powder coated RAL

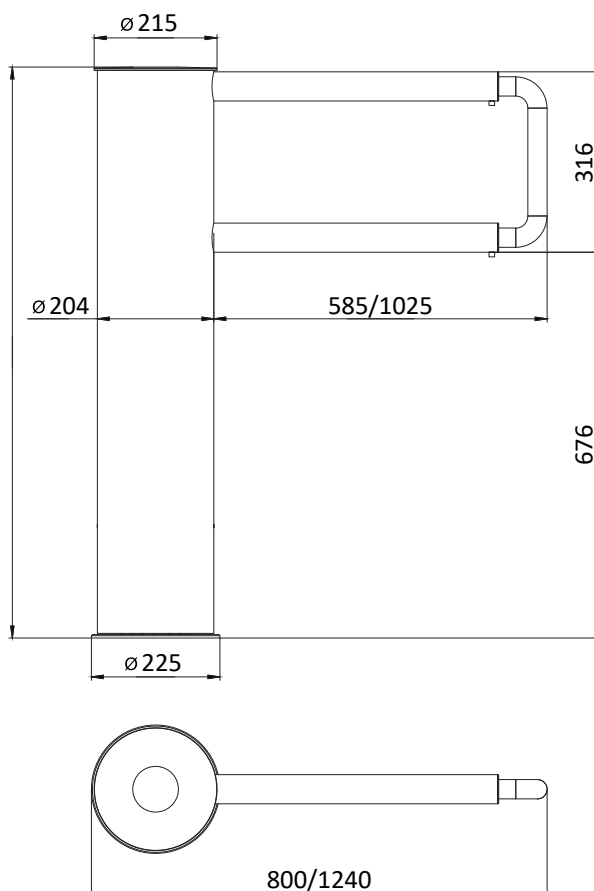

Specifications are subject to change without prior notice.

